



## MICRO RICEVENTE RTW / RTW MICRO RECEIVER

### GO-ER MINI

Funzionamento tramite pulsante e telecomando.

Operation via button and remote.



GO-ER MINI



La ricevente Go-er mini funziona in abbinamento ai motori filari (1 motore per ricevente) ed è stata studiata per essere applicata all'interno della scatola 503. Idonea per controllare tapparelle e screen verticali, può memorizzare fino a 12 telecomandi e permette di aggiungere il 3° e il 4° finecorsa. E' compatibile con i controlli radio RTW e con il nuovo sistema per la domotica MY HIGGINS.


The receiver Go-er mini works with wired motors (1 motor per receiver) and was designed to be installed inside the 503 box.

Suitable for shutters and vertical screens, it can store up to 12 remotes and it allows to add the 3rd and 4th end limit stops.

Compatible with all RTW radio controls and the new MY HIGGINS home automation system.

### CARATTERISTICHE TECNICHE / TECHNICAL FEATURES:

- Codice / Code: **2211272**
- Livello di inquinamento / Pollution level: **Class 2**
- Indice di protezione / Protection rating: **IP20**
- Frequenza di trasmissione / Transmission frequency: **433,42 MHz**
- Temperatura di esercizio / Working temperature: **da / from -20° C a / to +50° C**
- Altitudine massima di funzionamento / Max operating altitude: **< 2000 m.**
- Umidità di esercizio / Operating humidity: **compresa / between 30% e / and 85%.**
- Dimensioni (LxPxH) / Dimensions: (LxDxH): **41 x 45 x 19 mm.**
- Alloggiamento in plastica / Plastic housing: **ABS-PC**
- Consumo in funzionamento normale / Consumption during normal operation: **continuo / uninterrupted 5V/120mA**
- Made in Germany

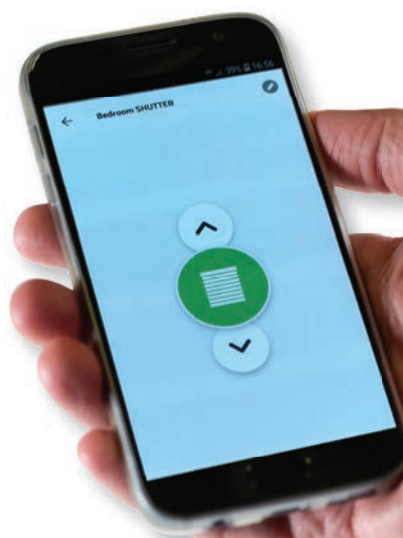

CODICE CODE	DESCRIZIONE DESCRIPTION	COLORE COLOUR	ALIMENTAZIONE POWER SUPPLY	IMBALLO PACKAGE
2211272	GO-ER Mini	BIANCO / WHITE	240-220 V	1 pz / pc