



MICRO RICEVENTE RTW PER LE LUCI / RTW MICRO LIGHT RECEIVER

GO-ER MINI LIGHT

Idonea per / Suitable for:



- lampade a incandescenza o alogene <500W
- lampade a risparmio energetico <60 W
- lampade a led <60 W
- Incandescent or halogen lamps <500W
- Energy-saving lamps <60W
- LED lamps <60w



GO-ER MINI LIGHT



La micro ricevente Go-er mini light è stata studiata per controllare lampade ad incandescenza, alogene, risparmio energetico e led tramite un telecomando RTW.

Una micro ricevente Go-er mini light può memorizzare fino a 12 telecomandi.

E' compatibile con i controlli radio RTW e con il nuovo sistema per la domotica MY HIGGINS.


The receiver Go-er mini light was designed to manage incandescent, halogen, energy-saving, or LED lamps through an RTW remote.

A single Go-er mini light receiver can store up to 12 remotes.

Compatible with RTW controls and with the new MY HIGGINS home automation system.

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES:

- Codice / Code: **2211273**
- Livello di inquinamento / Pollution level: **Class 2**
- Indice di protezione / Protection rating: **IP20**
- Frequenza di trasmissione / Transmission frequency: **433,42 MHz**
- Temperatura di esercizio / Working temperature: da / from **-20° C** a / to **+50° C**
- Altitudine massima di funzionamento / Max operating altitude: **< 2000 m.**
- Umidità di esercizio / Operating humidity: **compresa / between 30% e / and 85%.**
- Dimensioni (LxPxAl) / Dimensions: (LxDxH): **41 x 45 x 19 mm.**
- Alloggiamento in plastica / Plastic housing: **ABS-PC**
- Consumo in funzionamento normale / Consumption during normal operation: continuo / uninterrupted **5V/120mA**
- Made in Germany

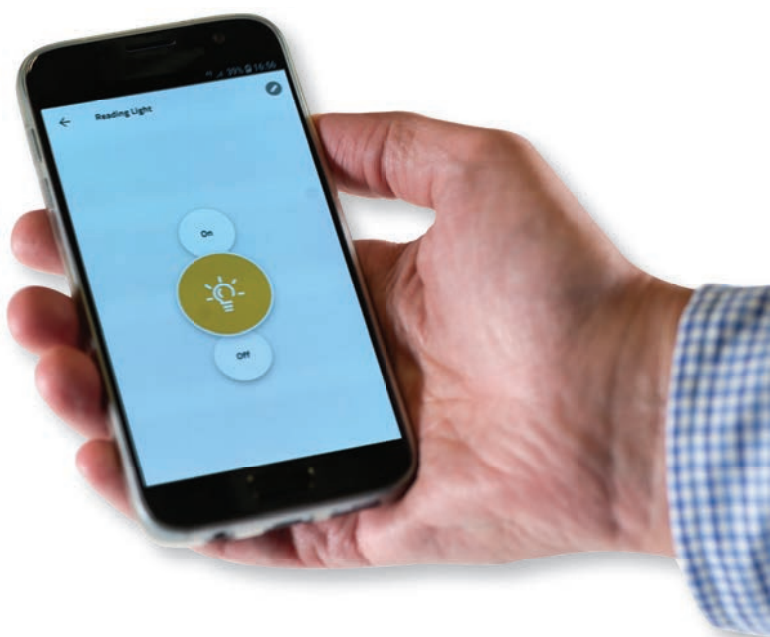

CODICE CODE	DESCRIZIONE DESCRIPTION	COLORE COLOUR	ALIMENTAZIONE POWER SUPPLY	IMBALLO PACKAGE
2211273	GO-ER Mini Light	BIANCO / WHITE	240-220 V	1 pz / pc